

Model

260MRT

MINI ROUGH TERRAIN
SCISSOR LIFT

JLG®

Features

65 x 102 in. (1.65 x 2.59 m)
Steel Platform
4 ft (1.22 m) Manual Roll-Out
Deck Extension
Fold-Down Platform Rails
Moveable, Removable Platform
Control Box
Proportional Hydrostatic Drive
Control with Thumb Steer
Proportional Lift Up
110V-AC Receptacle in Platform
Horn
Hourmeter
3 Degree Slope Alarm and Light
Lubrication-Free Scissor Arm Bushings
Scissor Maintenance Prop
Manual Descent Pull Cable
Heavy Gauge Steel Chassis Hoods
Nickel Plated Pins, Yellow Zinc-Chromate
Plated Fasteners
26 x 12 in. Lug Tread Tires
All Motion Alarm

Accessories & Options

26 x 12 Foam Filled Tires
Platform Work Lights
Full Swing-Gate
110V-AC Generator
Flashing Beacon
33.5 lb (19.73 kg) Propane Tank
Hydraulic Leveling Jacks



Exceptional mobility on or off slab

- Narrow 69-inch chassis fits into tight spaces
- Standard four-wheel drive with 35% gradeability

Larger work platform, high capacity

- Large 65 x 102 in. deck space with 4-foot roll-out deck extension
- 1,250-pound platform capacity and up to 300 lb on the platform extension




Service and reliability

- Simplified ground control wiring for ease of service
- Automatic transmission control and full diagnostics

Model 260MRT

MINI ROUGH TERRAIN SCISSOR LIFT

Specifications

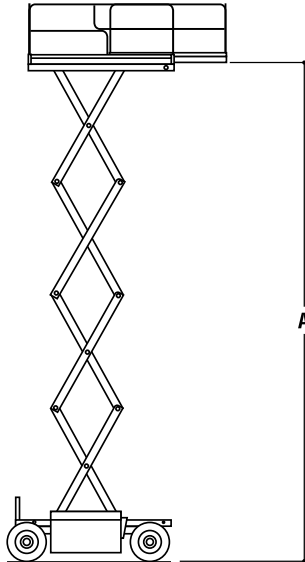

Dimensions

A. Platform Height Elevated	26 ft (7.92 m)
B. Platform Height Lowered	4 ft 1.5 in. (1.26 m)
C. Platform Railing Height	3 ft 7.5 in. (1.1 m)
D. Overall Height	7 ft 9.5 in. (2.37 m)
E. Platform Size	65 x 102 in. (1.65 x 2.59 m)
F. Platform Extension	4 ft (1.22 m)
G. Overall Width	5 ft 9 in. (1.75 m)
H. Overall Length (no outriggers)	8 ft 9 in. (2.67 m)
I. Wheelbase	6 ft 6 in. (1.98 m)
J. Ground Clearance	8 in. (20 cm)
Platform Capacity	1,250 lb (567 kg)
Capacity on Deck Extension	300 lb (136 kg)
Lift/Lower Speed	27/21 sec.
Maximum Drive Height	Full Height
Gross Vehicle Weight	7,360 lb (3,338 kg)

Chassis

Drive Speed-Lowered	3.5 mph (5.6 kmph)
Drive Speed-Elevated	0.4 mph (0.6 kmph)
Gradeability	35%
Turning Radius (inside)	84 in. (2.13 m)
Tire Size/Type	26 x 12 Lug Tread
Brakes	Spring Applied Hydraulically Released

Power system

Dual Fuel Engine	Kubota 24.5 hp (18.3 kW)
Diesel Engine	Kubota 26 hp (19.4 kW)
Fuel Tank Capacity	7.5 gal. (28.39 L)
Hydraulic Reservoir	15 gal. (56.78 L)



Standard Four-Wheel Drive for Terrainability



Strengthened Arm Stack for Improved Stack Rigidity

The JLG "1 & 5" Warranty

JLG Industries, Inc. backs our products with our exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) full years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable OSHA Regulations in 29 CFR 1910.67, 29 CFR 1926.453 and ANSI A92.6-2006 as originally manufactured for intended applications.



JLG Industries, Inc.
1 JLG Drive
McConnellsburg, PA 17233-9533
Telephone 717-485-5161
Toll-free in US 877-JLG-LIFT
Fax 717-485-6417
www.jlg.com

An Oshkosh Truck Corporation Company