


ABLE

EQUIPMENT RENTAL

ASSEMBLED RIGGING TRUCK SPECIFICATIONS

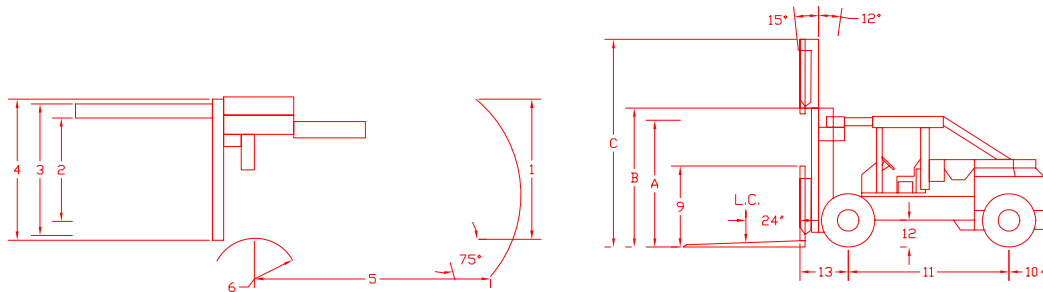

80,000LBS @ 24" LOAD CENTER

Total Weight of Chassis: 44,640 lbs
 Small Center Cwt: 11,305 lbs
 Main Cwt: 16,160 lbs
 Boom & Rest Wt. ~4,000 lbs

A = 98"			
B = 106"			
C = 161"			
1 - WIDTH ACROSS COUNTERWEIGHT	95.5"		
2 - TREAD WIDTH, DRIVE AXLE	74.4"		
3 - FORK SPREAD(STANDARD)	98.0"		
4 - WIDTH OVER TIRES	101.5"		
5 - OUTSIDE TURN RADIUS (TAIL SWING)	196.0"		
6 - INSIDE TURN RADIUS	23.25"		
7 - HEIGHT TO TOP OF "A" FRAME	102.0"		
8 - HEIGHT TO TOP OF COUNTERWEIGHT	VARIES		
9 - HEIGHT TO TOP OF CARRIAGE	99.0"		
10 - STEER AXLE, CL TO REAR OF COUNTERWEIGHT	37.0"		
11 - WHEELBASE	127.0"		
12 - UNDERCLEARANCE (MAST)	4.0"		
13 - DRIVE AXLE CL TO CARRIAGE FACE	37.5"		
14 - OVERALL LENGTH, LESS FORKS	199.0"		
MIN. AISLE / RIGHTANGLE STACK (LOAD LENGTH)	227.5"		
GRADEABILITY	EMPTY	31.2%	
	LOADED	51.3%	
GRADE CLEARANCE	CENTER OF TRUCK	63%	
	REAR OVERHANG	48%	
TIRES	10:00X20 SOLO MATIC		
90 DEGREE MIN. INTERSECTING AISLE	161.6"		
		EMPTY	LOADED
TRAVEL SPEED	1ST.	2.0 MPH	2.0 MPH
	2ND.	4.0 MPH	4.0 MPH
	3RD.	11.0 MPH	N.A.