

# Reach Forklifts



Available for  
**RENT SALE**



Lull 644E 6000 lb. capacity reach forklift.




The new Lull 644E-42 features the "Place Ace" system that gives you an additional 80-inches of forward reach by sliding the entire boom forward.

## Lull TransAction Telehandlers

**6000 to 10,000 lb. Lift Capacity • 34 to 54 ft. Lift Height**

For general construction, steel-erection, masonry and framing, Lull telescopic handlers from United Rentals offer you reach, precision and versatility. These machines have the ability to move an entire load 80" horizontally at full height without driving or multi-functioning the boom (72" for "D" models). The entire elevating assembly translates from the rear of the chassis towards the front. This is ideal for loading material onto scaffolding or other elevated work areas. Automatic fork leveling is standard. Hydraulic joystick controls provide steady and accurate load placement. Low boom design enhances visibility. Tight turning radius offers excellent maneuverability on the job site. For performance under rough terrain or muddy conditions chose from 2-wheel, 4-wheel or crab steering modes.

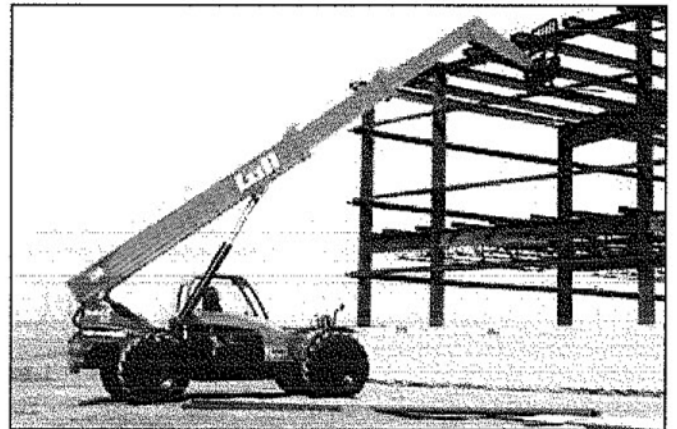

The new Lull 944E with "Place Ace" forward reach system.

Model Number	644D-34	New 644E-42	844C-42	New 944E	1044C-54
Max. Capacity	6000 lb	6000 lb	8000 lb	9000 lb	10,000 lb
Max. Lift Height	34 ft	42 ft	42 ft	42 ft	54 ft
Lift Cap. Full Height	5500 lb	6000 lb	6000 lb	6000 lb	4000 lb
Max. Forward Reach	23' (29')	28' 10" (35' 6")	25' (32')	28' 10" (35' 6")	38' (45')
Max. Forward Lift	1000 lb (150 lb)	1500 lb (500 lb)	2000 lb (500 lb)	2000 lb (500 lb)	3000 lb (1500 lb)
Frame Leveling	10° L/R	12° L/R	12.5° L/R	12° L/R	12.5° L/R
Engine (Diesel)	85 HP Turbo	99 HP Turbo	110 HP Turbo	110 HP Turbo	115 HP Turbo
Outside Turn Radius	13 ft 6 in	12 ft 3 in	13 ft 8 in	12 ft 3 in	13 ft 8 in
Operating Weight	18,400 lb	23,470 lb	23,160 lb	26,860	31,100 lb
Cat Class	233-1160	233-1170	233-1370	233-1470	233-1650