


ABLE

EQUIPMENT RENTAL

ASSEMBLED RIGGING TRUCK SPECIFICATIONS

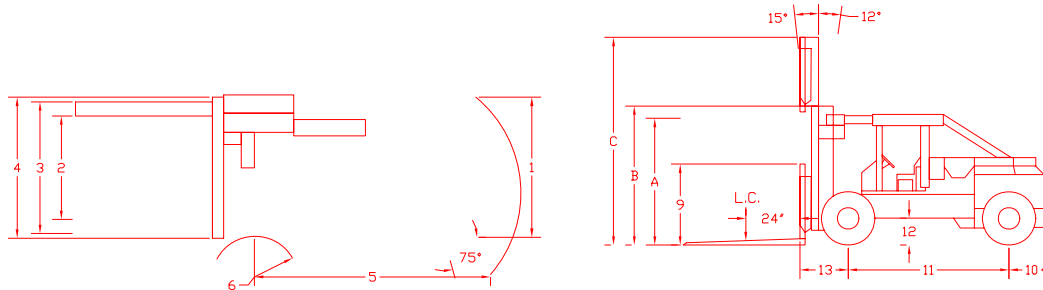

80,000LBS @ 24" LOAD CENTER

Total Weight of Chassis: 44,640 lbs
 Small Center Cwt: 11,305 lbs
 Main Cwt: 16,160 lbs
 Boom & Rest Wt. ~4,000 lbs

| | | | |
|--|---------------------|----------|---------|
| A = 98" | | | |
| B = 106" | | | |
| C = 161" | | | |
| 1 - WIDTH ACROSS COUNTERWEIGHT | 95.5" | | |
| 2 - TREAD WIDTH, DRIVE AXLE | 74.4" | | |
| 3 - FORK SPREAD(STANDARD) | 98.0" | | |
| 4 - WIDTH OVER TIRES | 101.5" | | |
| 5 - OUTSIDE TURN RADIUS (TAIL SWING) | 196.0" | | |
| 6 - INSIDE TURN RADIUS | 23.25" | | |
| 7 - HEIGHT TO TOP OF "A" FRAME | 102.0" | | |
| 8 - HEIGHT TO TOP OF COUNTERWEIGHT | VARIES | | |
| 9 - HEIGHT TO TOP OF CARRIAGE | 99.0" | | |
| 10 - STEER AXLE, CL TO REAR OF COUNTERWEIGHT | 37.0" | | |
| 11 - WHEELBASE | 127.0" | | |
| 12 - UNDERCLEARANCE (MAST) | 4.0" | | |
| 13 - DRIVE AXLE CL TO CARRIAGE FACE | 37.5" | | |
| 14 - OVERALL LENGTH, LESS FORKS | 199.0" | | |
| | | | |
| MIN. AISLE / RIGHTANGLE STACK (LOAD LENGTH) | 227.5" | | |
| GRADEABILITY | EMPTY | 31.2% | |
| | LOADED | 51.3% | |
| GRADE CLEARANCE | CENTER OF TRUCK | 63% | |
| | REAR OVERHANG | 48% | |
| TIRES | 10:00X20 SOLO MATIC | | |
| 90 DEGREE MIN. INTERSECTING AISLE | 161.6" | | |
| | | EMPTY | LOADED |
| TRAVEL SPEED | 1ST. | 2.0 MPH | 2.0 MPH |
| | 2ND. | 4.0 MPH | 4.0 MPH |
| | 3RD. | 11.0 MPH | N.A. |