

Reach Forklifts



Available for
RENT SALE



Lull 644E 6000 lb.
capacity reach forklift.




The new Lull 644E-42 features the "Place Ace"
system that gives you an additional 80-inches
of forward reach by sliding the entire boom forward.

Lull TransAction Telehandlers

6000 to 10,000 lb. Lift Capacity • 34 to 54 ft. Lift Height

For general construction, steel-erection, masonry and framing, Lull telescopic handlers from United Rentals offer you reach, precision and versatility. These machines have the ability to move an entire load 80" horizontally at full height without driving or multi-functioning the boom (72" for "D" models). The entire elevating assembly translates from the rear of the chassis towards the front. This is ideal for loading material onto scaffolding or other elevated work areas. Automatic fork leveling is standard. Hydraulic joystick controls provide steady and accurate load placement. Low boom design enhances visibility. Tight turning radius offers excellent maneuverability on the job site. For performance under rough terrain or muddy conditions chose from 2-wheel, 4-wheel or crab steering modes.

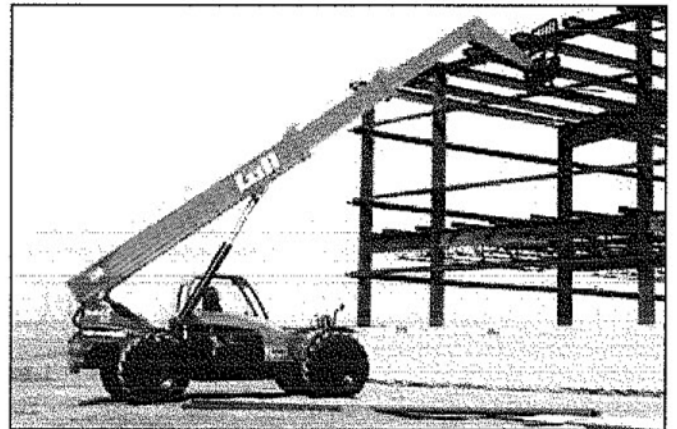

The new Lull 944E with "Place Ace" forward reach system.

| Model Number | 644D-34 | New 644E-42 | 844C-42 | New 944E | 1044C-54 |
|-----------------------|------------------|------------------|------------------|------------------|-------------------|
| Max. Capacity | 6000 lb | 6000 lb | 8000 lb | 9000 lb | 10,000 lb |
| Max. Lift Height | 34 ft | 42 ft | 42 ft | 42 ft | 54 ft |
| Lift Cap. Full Height | 5500 lb | 6000 lb | 6000 lb | 6000 lb | 4000 lb |
| Max. Forward Reach | 23' (29') | 28' 10" (35' 6") | 25' (32') | 28' 10" (35' 6") | 38' (45') |
| Max. Forward Lift | 1000 lb (150 lb) | 1500 lb (500 lb) | 2000 lb (500 lb) | 2000 lb (500 lb) | 3000 lb (1500 lb) |
| Frame Leveling | 10° L/R | 12° L/R | 12.5° L/R | 12° L/R | 12.5° L/R |
| Engine (Diesel) | 85 HP Turbo | 99 HP Turbo | 110 HP Turbo | 110 HP Turbo | 115 HP Turbo |
| Outside Turn Radius | 13 ft 6 in | 12 ft 3 in | 13 ft 8 in | 12 ft 3 in | 13 ft 8 in |
| Operating Weight | 18,400 lb | 23,470 lb | 23,160 lb | 26,860 | 31,100 lb |
| Cat Class | 233-1160 | 233-1170 | 233-1370 | 233-1470 | 233-1650 |