










MRT PRIVILEGE PLUS ROTATING TELESCOPIC HANDLER SPECIFICATIONS

		MRT 2150 Privilege Plus	MRT 2540 Privilege Plus	MRT 3255 Privilege Plus
 CAPACITIES	Lift Capacity with Forks (kg)	11,000 lbs. (5000)	8,800 lbs. (4000)	12,100 lbs. (5500)
	Lift Capacity with Winch (kg)	11,000 lbs. (5000)	8,800 lbs. (4000)	15,800 lbs. (7200)
	Max. Lift Height (m)	67'7" (20.6)	80'8.5" (24.6)	103'4" (31.5)
	Capacity at Max. Lift Height (kg)	5,500 lbs. (2500)	3,800 lbs. (1750)	5,500 lbs. (2500)
	Max. Forward Reach (m)	59'5" (18.11)	60'8" (18.5)	89'3" (27.2)
	Cap. at Max. Forward Reach (kg)	1,320 lbs. (600)	800 lbs. (400)	440 lbs. (200)
 ENGINE	Manufacturer	Mercedes-Benz		
	Power (kW)	156 hp (115) Tier IV		231 hp (170) Tier IV
	Aspiration	Diesel Turbocharged		
	Model	OM 934 E4-5		OM 934 LA
	Rated Speed	2200 rpm		
	Torque (Nm) @ rpm	498 ft.-lbs. (675) @ 1200 to 1600		664 ft. lbs. (900)
	 COMPONENTS	Transmission	Hydrostatic Transmission	
Max Travel Speed (km/hr)		22.4 mph (36)		25 mph (40)
Selective Steering		2-Wheel, 4-Wheel, Crab		
Service Brake		Hydraulic Multi-Disc Brakes and Front and Rear Axles		
Parking Brake		Hydraulic Front Axle		
Axle Manufacturer		Dana		
 HYDRAULIC SYSTEM	Pump Type	Piston Pump		
	Total Capacity (L/min)	30.4 gpm (115)		55.5 gpm (210)
	System Pressure (bar)	3989 psi (275)		5145 psi (350)
 GENERAL SPECIFICATIONS	Approximate Weight (kg)	38,845 lbs. (17620)	41,006 lbs. (18600)	52,880 lbs. (23986)
	Length - Less Forks (m)	22'5" (6.82)	25'7" (7.79)	27'7" (8.41)
	Width (m)	8'1" (2.46)		8'3" (2.50)
	Ground Clearance (mm)	13.8" (350)		16" (420)
	Wheelbase (m)	10'0" (3.05)		12'4" (3.75)
	Turning Radius -Outside Tire (m)	16'0" (4.88)		16'1" (4.91)
	Overall Height (m)	10'3" (3.13)		10'10" (3.30)
	Standard Tires	18 x 22.5 16PR		Aeolus 17.5 x 25
	Drawbar Pull (daN)	18,434 lbf. (8200)		23,605 (10500)
	Lateral Frame Leveling	+ / - 8°		
	Longitudinal Frame Leveling	N/A	N/A	+ / - 3°
 FLUID CAPACITIES	Cooling System (L)	4.75 gal. (18)		9.25 gal. (35)
	Engine Oil (L)	4 gal. (15)		5.4 gal. (20.5)
	Hydraulic Oil (L)	78.5 gal. (297)		78.5 gal. (297)
	Fuel Tank (L)	95.4 gal. (361)		95.4 gal. (361)
	Urea- Ad Blue (L)	14 gal. (54)		16.6 gal. (63)


DIMENSIONS REFERENCE DIAGRAMS

(MRT 3255 Privilege Plus shown)

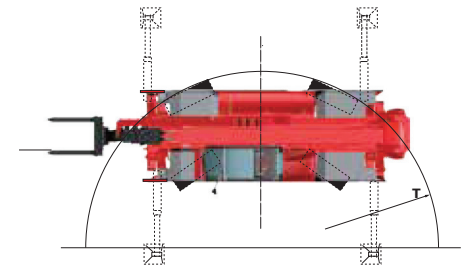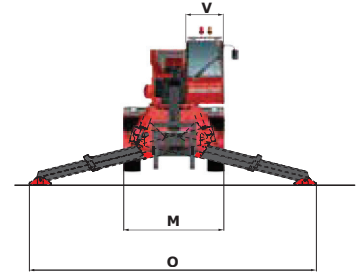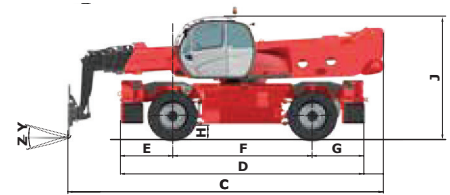

(mm)	MRT 2150 Privilege Plus	MRT 2540 Privilege Plus	MRT 3255 Privilege Plus
C	22'5" (6825)	25'7" (7795)	27'7" (8412)
D	17'6" (5350)	17'6" (5350)	21'7" (6568)
E	3'9" (1150)	3'9" (1150)	4'7.5" (1409)
F	10'0" (3050)	10'0" (3050)	12'4" (3750)
G	3'9" (1150)	3'9" (1150)	4'7.5" (1409)
H	13.8" (350)	13.8" (350)	16" (420)
J	10'3" (3130)	10'3" (3130)	10'10" (3306)
M	8'1" (2465)	8'1" (2465)	8'3" (2500)
O	16'9" (5115)	16'9" (5115)	23'3.5" (7100)
T	16" (4880)	16" (4880)	16'1" (4910)
V	3'1.4" (950)	3'1.4" (950)	3'1" (933)
Y	12°	12°	12°
Z	105°	105°	105°

This publication in no way constitutes an offer and the company reserves the right to alter specification without notice.



Manitou Americas, Inc. • PO Box 179 • West Bend, WI 53095
Tel: 262-334-9461 • Fax: 262-338-7517 • www.manitou.com

©2015 Manitou Americas, Inc. Manitou. All rights reserved. Printed in the U.S.A. A Manitou Group brand.

09/2015-MRTSeries